

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Highest UV and chlorine resistance
Höchste UV- und Chlorbeständigkeit
La plus grande résistance aux UV et au chlore
Máxima resistencia a los UV y al cloro
Hoogste UV- en chloorbestendigheid



All climate appropriate
Geeignet für alle Klimatypen
Approprié à tous climats
Apropiado para todos los climas
Geschikt voor alle klimaten



Compliant to NFP90306/308
Konform mit NFP90306/308
Conforme à NFP90306/308
Cumple con NFP90306/308
Conform NFP90306/308



Wide standard colour range
Grosse Standardfarbenkollektion
Grande gamme de couleurs standards
Amplia gama de colores estándar
Groot assortiment standaardkleuren



Pool



sports, leisure
& advertising

CAT0303INT261

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	B7124 NF P 90-308 compliant + versatile	B7332 NF P 90-308 compliant	Eurocore 55 (W50509001) Multi-use + 80% wind reduction (NF P 90-306 compliant)
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	580 g/m²	650 g/m²	250 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling		PES + PVC	
Fabric (Warp / Weft) DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel		PES, 1100 dtex PES, 1100 dtex	
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	-
Breaking Strength (Warp / Weft) ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	2500 N/5cm 2000 N/5cm	2500 N/5cm 2000 N/5cm	≥ 1600 N/5cm ≥ 1600 N/5cm
Tear Strength (Warp / Weft) DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	270 N 270 N	270 N 270 N	≥ 400 N ≥ 400 N
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	60 N/5cm	90 N/5cm	-
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-30/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	7-8	6-8
Fire Behaviour - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	< 100 mm/min	-



Registration, Evaluation, Authorization and restriction of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar




your guide to coated fabrics

Go to [sicline.com](https://www.sicline.com) for more information.
Fabriekstraat 23 - 8850 Ardoole - Belgium
+32 (0) 51 740 900 - info@sicline.com - [sicline.com](https://www.sicline.com)

Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All Sicline products comply with the Reach Regulation 1907/2006/CE. Last modified: 3 februari 2026 11:04 a.m..



Pool



The worldwide market reference



Highest UV and chlorine resistance



Compliant to NFP90306/308



All climate appropriate



Wide standard colour range


B7124 // B7332 // Eurocore 55

NEOS

NEOS

B7124

NF P 90-308 compliant + versatile // Konform mit NF P 90-308 + vielseitig // Conforme à la norme NF P 90-308 + polyvalent // Cumple con NF P 90-308 + versátil // Conform NF P 90-308 + veelzijdig

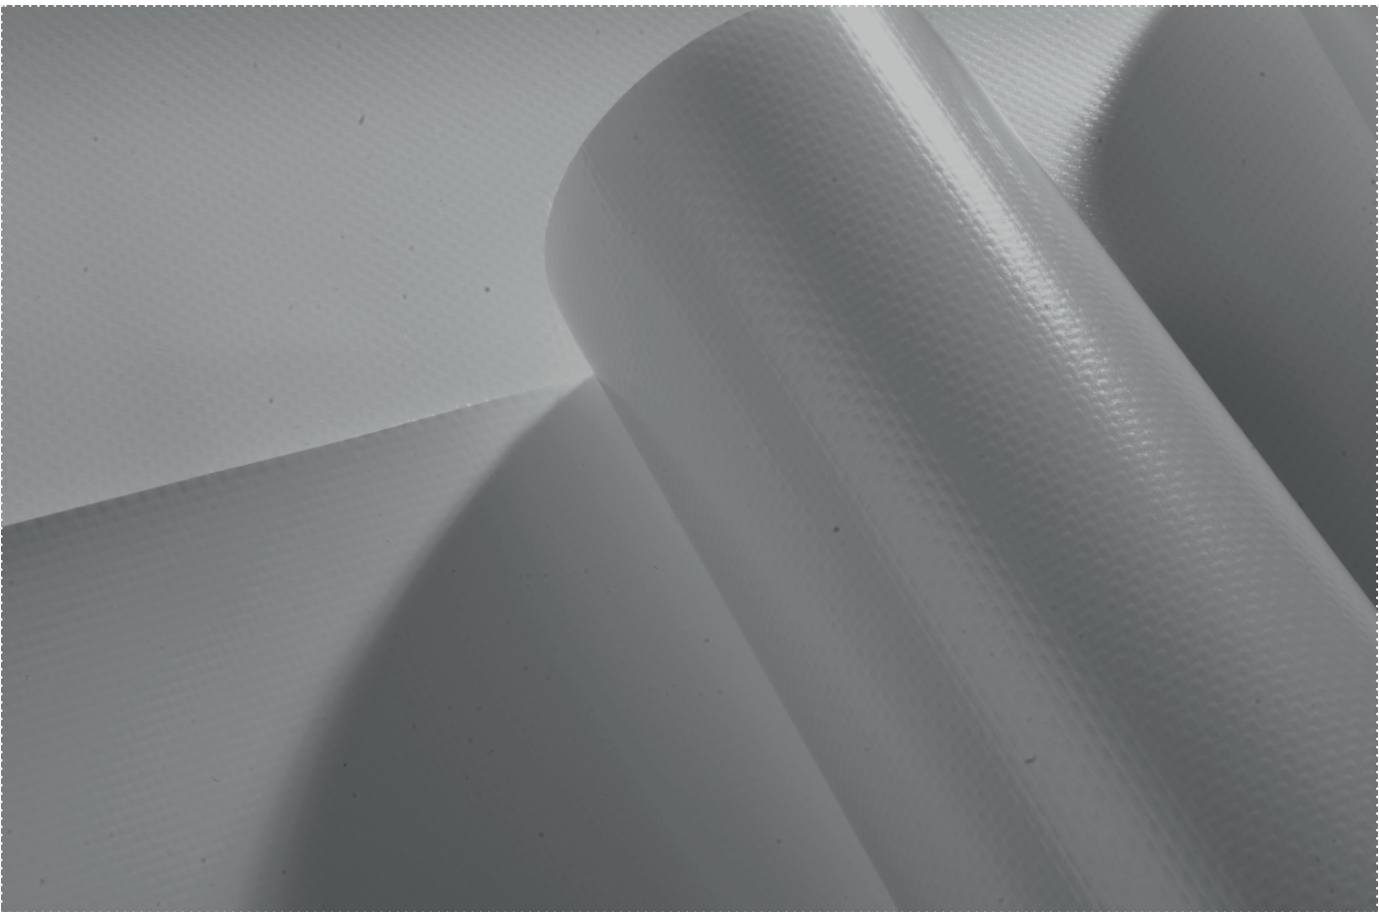



1709 (unicolor)
↔ 250 cm, 300 cm



7003 (unicolor)
↔ 300 cm



7325 (bicolor)
↔ 300 cm



7179 (unicolor)
↔ 250 cm





5068 (bicolor)
↔ 250 cm, 300 cm



6111 (bicolor)
↔ 250 cm



6194 (bicolor)
↔ 250 cm, 300 cm



6283 (bicolor)
↔ 300 cm



7285 (bicolor)
↔ 250 cm



7336 (bicolor)
↔ 250 cm




8105 (bicolor)
↔ 250 cm, 300 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande // Otros colores bajo pedido // Andere kleuren op aanvraag

B7332

NF P 90-308 compliant // Konform mit NF P 90-308 // Conforme à la norme NF P 90-308 // Cumple con NF P 90-308 // Conform NF P 90-308

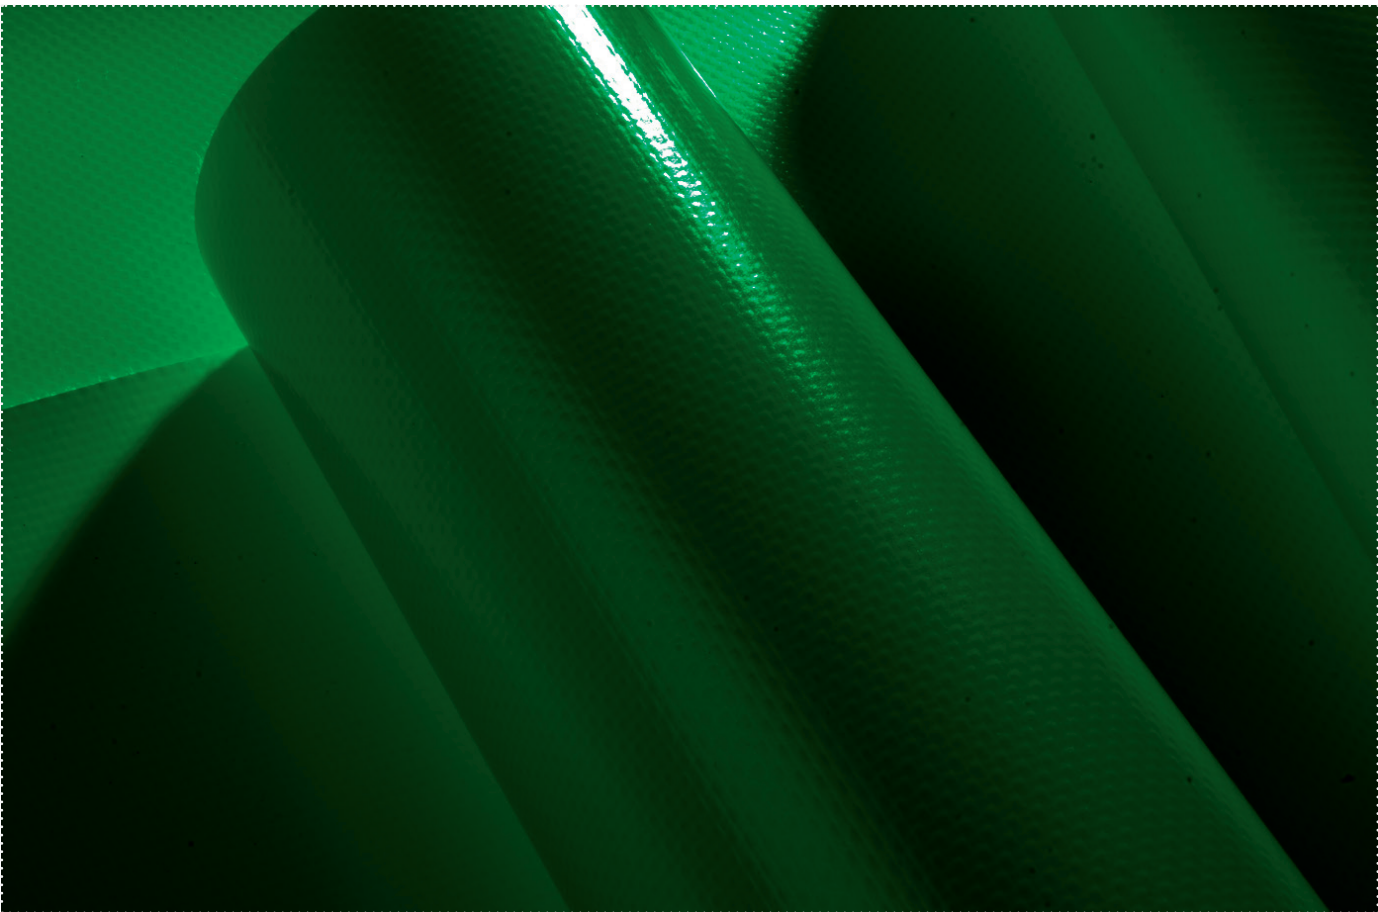

On request


Auf Anfrage // Sur demande
// Bajo pedido // Op verzoek



Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande // Otros colores bajo pedido // Andere kleuren op aanvraag

Eurocore 55 (W50509001)

Multi-use + 80% wind reduction // Vielseitig einsetzbar + 80% Windreduzierung // Multi-usage + 80% de réduction du vent // Multiuso + 80% de reducción de viento // Veelzijdig + 80% windreductie

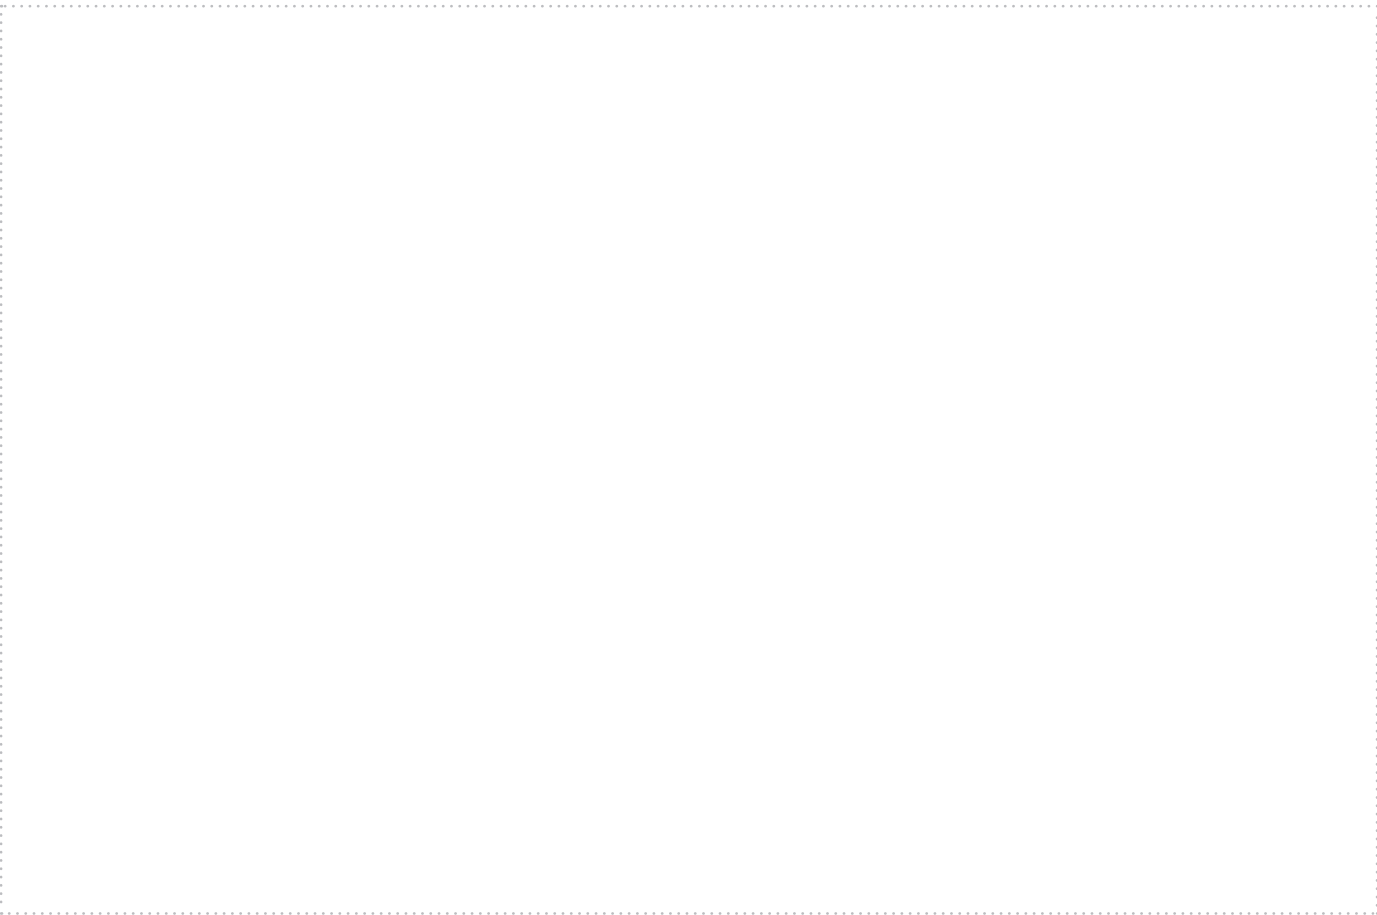



1399
↔ 210cm, 320cm



3130
↔ 210cm, 320cm



5601
↔ 210cm



5603
↔ 210cm, 320cm, 370cm




6601
↔ 320cm



6602
↔ 210cm, 320cm, 370cm



7601
↔ 210cm, 320cm, 370cm



7999
↔ 210cm, 320cm, 370cm



9917
↔ 210cm, 320cm, 370cm



Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande // Otros colores bajo pedido // Andere kleuren op aanvraag