

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

|                                                                                                                                                        | P7259<br>Frontlit semi dull/glossy | P5600<br>Block out               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------------------|
| <b>Total Weight</b> - ISO 2286/2:2016<br>Gesamtgewicht // Poids total // Peso total // Totaal gewicht                                                  | 600 g/m²                           | 650 g/m²                         |
| <b>Composition</b><br>Zusammensetzung // Composition // Composición // Samenstelling                                                                   | PES + PVC                          |                                  |
| <b>Fabric (Warp / Weft)</b><br>DIN ISO 2060:1994<br>Gewebe // Tissu // Tejido // Weefsel                                                               | PES, 1100 dtex<br>PES, 1100 dtex   | PES, 550 dtex<br>PES, 550 dtex   |
| <b>Lacquering</b><br>Lackierung // Laquage // Tipo lacado // Lacquering                                                                                | Top: semi dull<br>Bottom: glossy   | Top: semi dull<br>Bottom: glossy |
| <b>Breaking Strength (Warp / Weft)</b> - ISO 1421/1:2016<br>Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte           | 2500 N/5cm<br>1800 N/5cm           | 2100 N/5cm<br>1500 N/5cm         |
| <b>Tear Strength (Warp / Weft)</b> - DIN 53363:2003<br>Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand     | 250 N<br>250 N                     | 100 N<br>100 N                   |
| <b>Adhesion</b> - ISO 2411:2017<br>Haftung // Adhérence // Adhesión // Hechting                                                                        | 80 N/5cm                           | 60 N/5cm                         |
| <b>Temperature resistance</b> - EN 1876/1:1998<br>Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid | -40/+70 °C                         | -40/+70 °C                       |
| <b>Light Fastness</b> - ISO 105 B02:2014<br>Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit                                      | 7-8                                | 7-8                              |
| <b>Fire Behaviour</b> - ISO 3795:1989<br>Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag                                      | < 100 mm/min                       | < 100 mm/min                     |



Registration,  
Evaluation,  
Authorization  
and restriction  
of Chemicals



Recyclable fabric  
Recyclable Textillen  
Textiles recyclables  
Productos reciclables  
Recycleerbaar textiel



Slitting (width) on request  
Schneiden (Breite) auf Anfrage  
Tronçonnage (largeur) sur demande  
Cortar (ancho) bajo pedido  
Snijden (breedte) op aanvraag



Sustainable options available  
Nachhaltige Optionen verfügbar  
Options durables disponibles  
Opciones sostenibles disponibles  
Duurzame opties beschikbaar

SIOEN




your guide to coated fabrics

Go to [sioline.com](https://sioline.com) for more information.  
Fabriekstraat 23 - 8850 Ardooie - Belgium  
+32 (0) 51 740 900 - [info@sioline.com](mailto:info@sioline.com) - [sioline.com](https://sioline.com)

  Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All Sioline products comply with the Reach Regulation 1907/2006/CE. Last modified: 19 februari 2026 11:17 a.m.



Advertising



Performance range for  
outdoor advertising



Digital printing  
fabric



Extremely  
ink-receptive  
top lacquers



All climate  
appropriate

P7259 // P5600

SIOEN

Advantages

Vorteile // Avantages // Ventajas // Voordelen



**Digital printing fabric**  
Digitaldruckgewebe  
Toile imprimerie digitale  
Tejido de impresión digital  
Doek digitale bedrukking




**All climate appropriate**  
Geeignet für alle Klimatypen  
Approprié à tous climats  
Apropiado para todos los climas  
Geschikt voor alle klimaten



**Extremely ink-receptive top lacquers**  
Extrem tintenaufnehmende Decklackschicht  
Couche supérieure de vernis réceptif à l'encre  
Lacas superiores muy receptivas a la tinta  
Extreem inktabsorberende toplaklagen

P7259


Frontlit semi dull/glossy // Frontlit semi-matt/hochglanz // Frontlit semi-mat/brillant // Frontlit semimate/brillante // Frontlit halfmat/glanzend

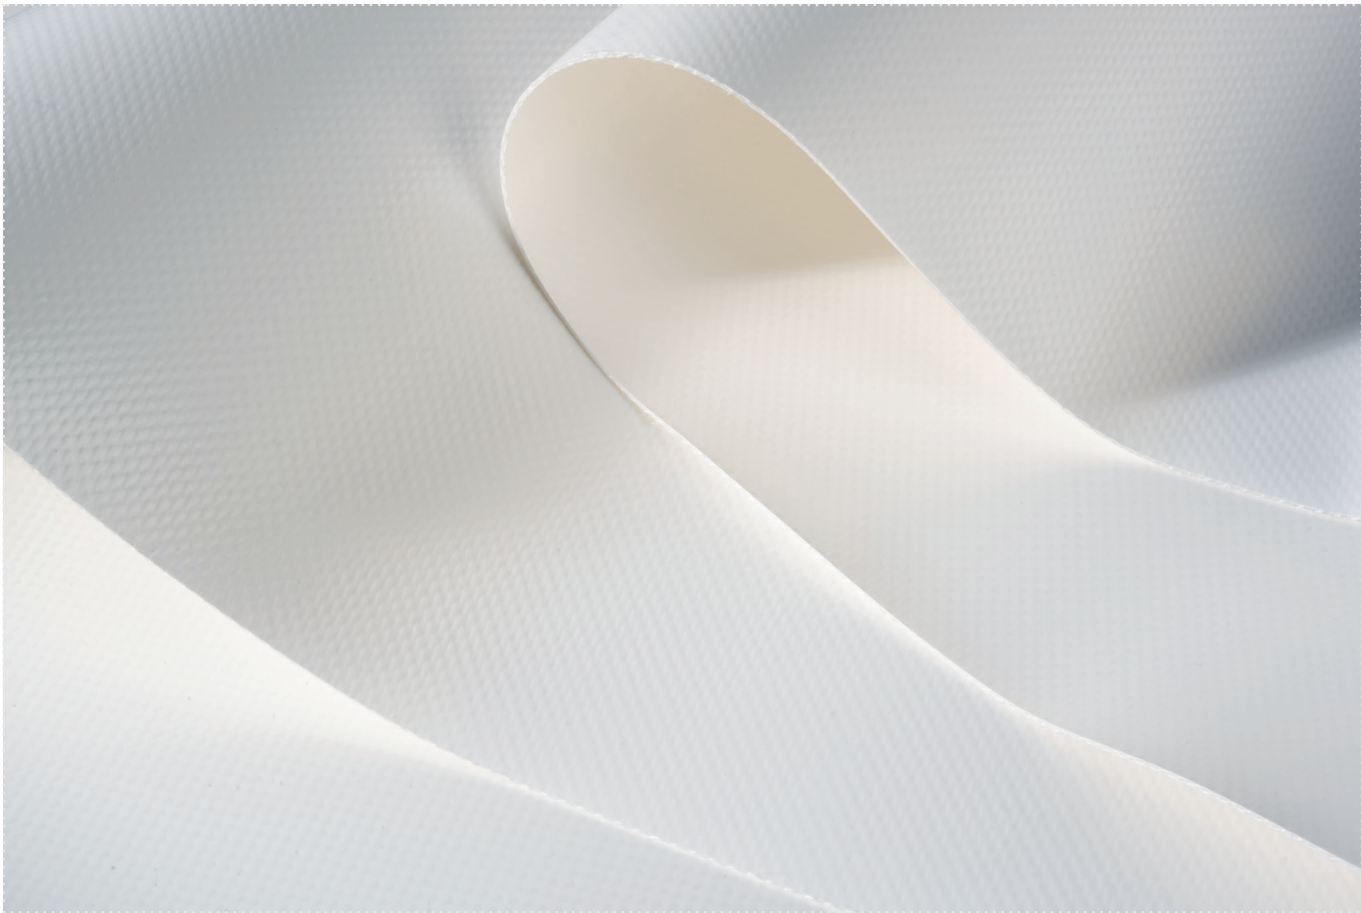

9917  
320 cm

P5600

Block out // Super undurchsichtig // Super opaque // Super opaco // Super opaak

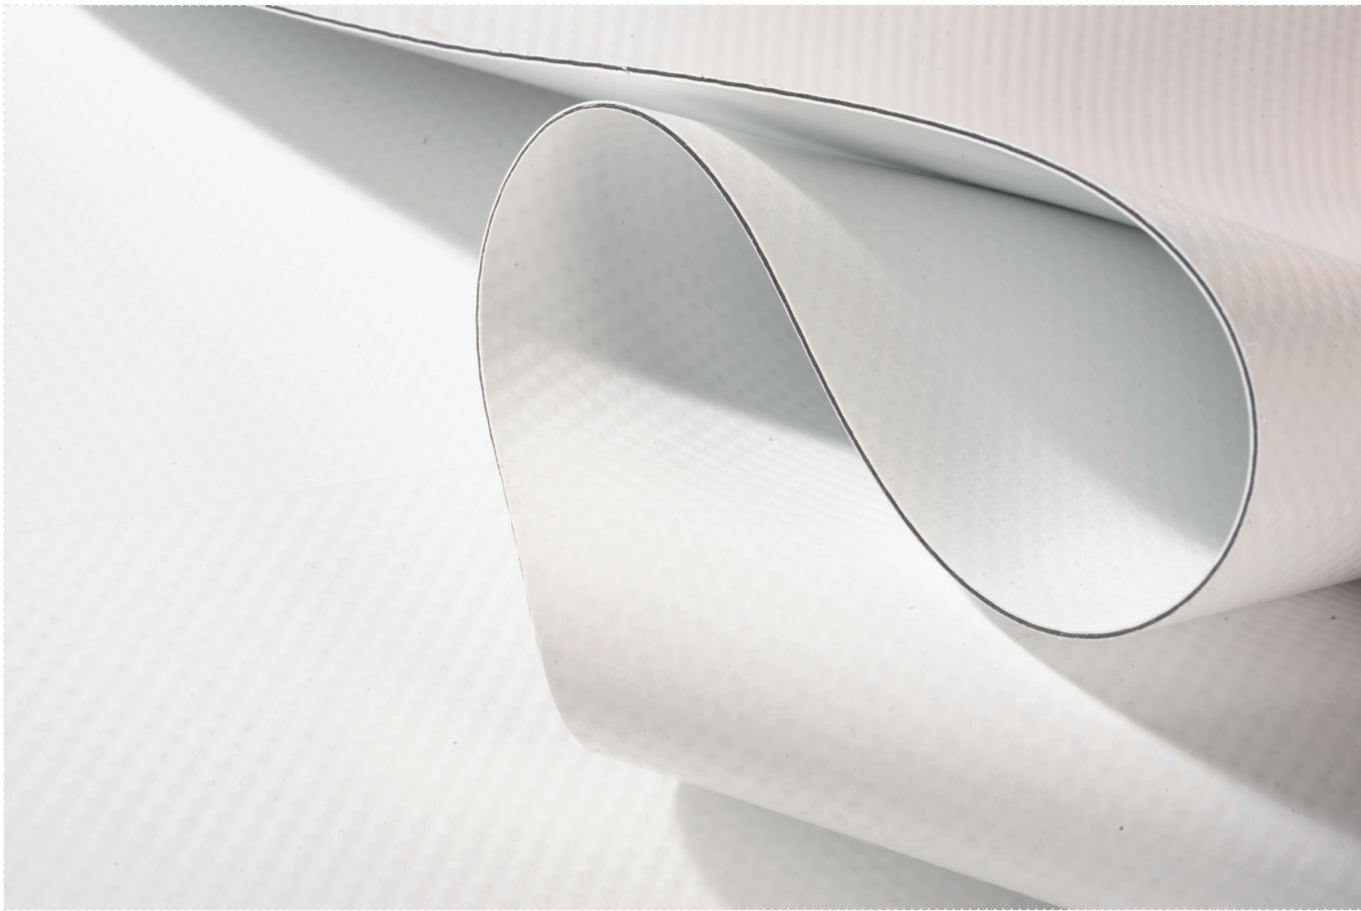

9917  
320 cm

